



DHS-R Hydraulic Presses

Benchtop and Automation Solutions

Standard Steel Frame Configurations


With Guided Ram Bolster	DHS-5R	DHS-10R	DHS-20R	DHS-40R
Tonnage	5.5	11	22	44
Stroke (Inches)	5.9"	7.9"	7.9"	7.9"
Open Height (Inches)	13.8"	13.8"	13.8"	13.8"
Approach Speed (IPM)	915	715	515	297
Pressing Speed (IPM)	215	66	35	28
Retract Speed (IPM)	940	685	522	280
Bed Table (W" x D")	17.7"x13.8"	18.9"x15.7"	21.6" x 15.7"	23.6"x15.7"
Ram Dimensions (W" x D")	11.8" x 7.9"	12.2" x 5.9"	15.7" x 9.8"	19.7" x 9.8"
Hydraulic Motor (HP)	3	3	5	7.5
Weight (lbs.)	1,870	2,315	3,530	6,615
Power	230V/3Ph	230V/3Ph	230V/3Ph	230V/3Ph
Throat Distance (In.)	7.3"	8"	8.7"	8.7"

- Standard pressure control
- Standard speed control
- Allen Bradley PLC Control System with Operator Interface
- 1 year warranty on material and workmanship
- Compact heavy duty design built for reliability
- Available in stock or by special order
- Energy efficient system
- Low noise output for quiet operation

DHS: Available with standard configurations that can be customized to your specifications

Available Options

Stroke	Multiple Control Platforms
Shut Height	460V/3PH Power System
Complete Integration Solutions	Pressure Switch
Complete Automation Solutions	Air/Water Cooler
Light Curtain Guarding	Reservoir Heater
Bolt on Expanded Metal Guarding	Heated Platens
Machining Requirements	Increased Tonnage (+40 Tons)
Guided Ram Bolster	*Other options available upon customer request.
Work Table with Casters	

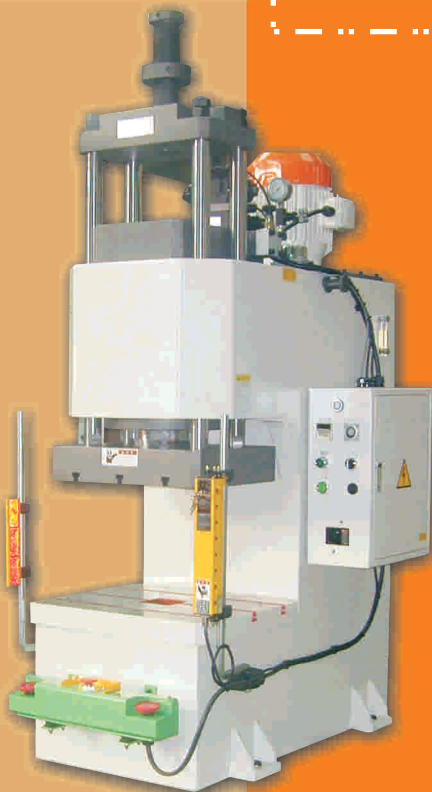

*Some options shown

